

Main Characteristics

Length Overall	210 ft
Beam	40 ft
Depth	14 ft
Operating Draft	12 ft
Light Draft	9 ft
Gross Tonnage	451

Capacities

Deadweight	1,105.8 LT	(1,123.5 mt)
Cargo Deck Area	142 ft x 30 ft4,260 ft ²	(43.2m x 9.14m394.9 m ²)
Cargo Deck Loading	540 lbs per ft ²	(2.6 mt per m²)
Deck Cargo	750 LT	(762.04 mt)
Fuel Oil Cargo	68,500 gal	(259.3 m³)
Fuel Oil Day Tank	10,181 gal	(38.54 m³)
Lube oil	600 gal	(2.77 m³)
Liquid Mud	3,420 bbls	(407.80 m³)
Dry Bulk	4,200 ft ³	(118.93 m³)
Potable Water	11,430 gal	(43.27 m³)
Rig Water	99,036 gal	(374.89 m³)

Performance

Top Speed Max Draft	12.5 knots	
Top Speed Light Draft	13.5 knots	
Fuel consumption at Operating Draft		
Max Speed	12.5 knots @ 130 gph	
Crusing Speed	11 knots @ 110 gph	

Propulsion

Main Engines	2 x QSK 50
Manufacturer	Cummins Diesel
Total Horsepower	3,200 BHP
Main Propulsion	2 x Twin Disc 6:140 gears with NIBRAL Wheels
Rudders	2 x Becker High-Lift Rudders
Bow Tunnel Thruster	1 x 750 HP Schottel - Controllable Pitch
Driven By	1 x Cummins QSK 19

Dynamic Positioning System

EMI - DP 1

2 Fully Independent USCG Approved DP Systems

2 each Starlink Invicta 210 DGPS Recievers

- 2 Raytheon Gyrostar II Gyros
- 2 Young Anemometers
- 1 MRU pitch and roll sensor
- 1 Independent backup joystick unit

C-Truc # 7

..... (64.01 m)

(12.19 m)

(4.27 m)

(3.66 m) (2.79 m)

Cargo Discharge

Fuel Oil
Rig Fresh Water
Liquid Mud (LM)
Bulk Material (BM)

400 gpm @200ft (90.9 m³/h @ 60.9 m) 400 gpm @200ft (90.9 m³/h @ 60.9 m) 1800 gpm @ 150ft (408 m3/h @ 45.7m) 2 x 1200 ft³ tanks / 2 x 1000 ft³ tanks 82 psi system 2 x Leroi 735 cfm Compressors

Accomodations

Accomodations for 18 people composed of:		
4 x 2 man cabins		
1 x 3 man cabins		
2 x 4 man cabins		
Walk in Refrigerator & Freezer		
Fully Airconditioned and Heated		

Electronics

3 x VHF Radio		

- 1 x Radio System Complient with GMDSS A3 Rules
- 1 x Navigation Gyro Compass
- 2 x Radars with ARPA
- 1 x PA / Loud Hailer
- 1 x EPIRB

Generators

Engine MFG	GM V8-71 Detroit Diesel
Volts Each	230 / 60
K.W.	99
Generator MFG	Delco

Life Saving Equipment / Fire Monitor

2 x 10 Man Life Rafts	
Other gear as required b	y USCG
1 8x6 Eiro Monitor	150ft @ 2600 GP

450ft @ 2600 GPM
(137.5m @ 24,800 m³/h)


Registration


Туре	Platform Supply Vessel
Owner/Operator	L&M Botruc Rental, Inc.
USCG Official #	648172
Year Built	1982
Builder	Offshore Trawlers, Inc
Stretched / Refurbished	2010
Ву	Bollinger Shipyards, Inc
Home Port	New Orleans, LA
Flag	U.S.A.
Classification	Subchapter L OSV
	ABS Loadline

18692 West Main Street Galliano, LA 70354 Phone (985) 475-5733 FAX (985)475-5669 www.botruc.com


Notice: The Data contained herein is provided to allow users to determine the suitability of the subject equipment. Data may vary from the current condition of equipment which can only be determined by physical inspection. Company has exercised due diligence to ensure that the data contained herein is reasonably accurate. However, Company does not warrant the accuracy or completeness of the data. In no event shall Company be liable for any damages whatsoever arising out of the use of the data contained herein.


C-TRUC No. 7 Offshore Supply Vessel

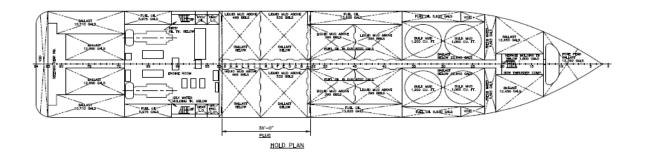



BRIDGE DECK (02 LEVEL)

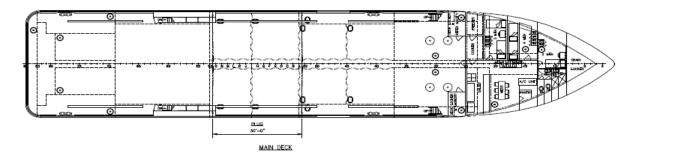



FOCSLE DECK (01 LEVEL)

